

ORELIA

GROUP

TILES


600 X 600 mm



ORELIA

GROUP

3 Layer In Double Charge Tile

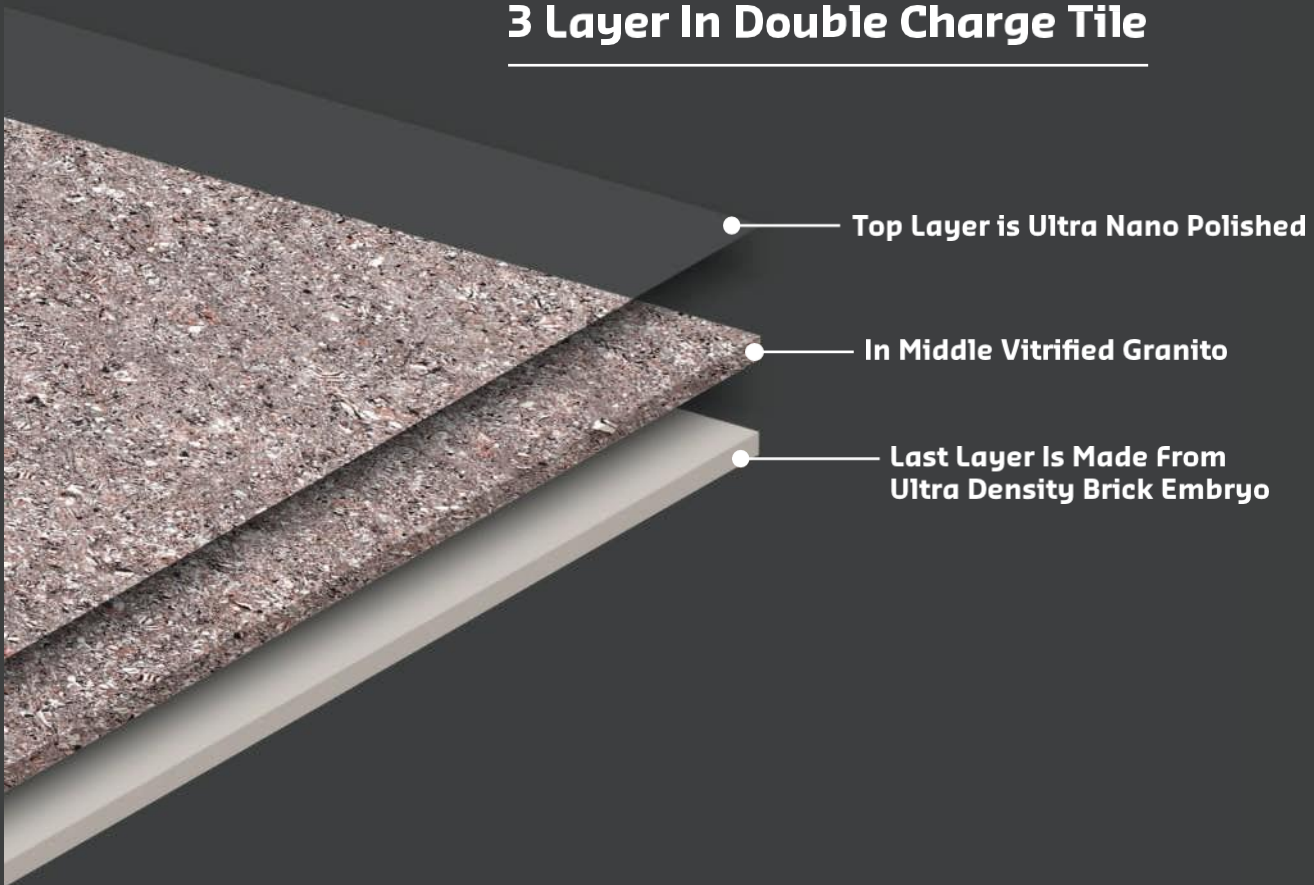

APPLICATIONS



URBAN
CANTERS



RESIDENTIAL
CENTRES



KITCHENS



HOSPITALS



SPORT
CENTRES



HOUSES
INDOOR



CLINICAL



BATHROOMS



SPAS



SHOPPING
PLACES



EXTRENAL
WALL COVERING



TRAFFIC
AREAS



OUTDOOR



SCHOOLS



ORELIA

GROUP

TILES

FEATURES



Easy to Install



Stain Resistance



Scratch Resistance



Chemical Resistance



Easy to Clean



Hygienic Surface



Zero PVC



Water Resistance



Magic

Series

600 x 600 mm

ORELIA
GROUP


TILES

ORELIA
GROUP

Magic
Series

MAGIC WHITE

600 x 600 mm

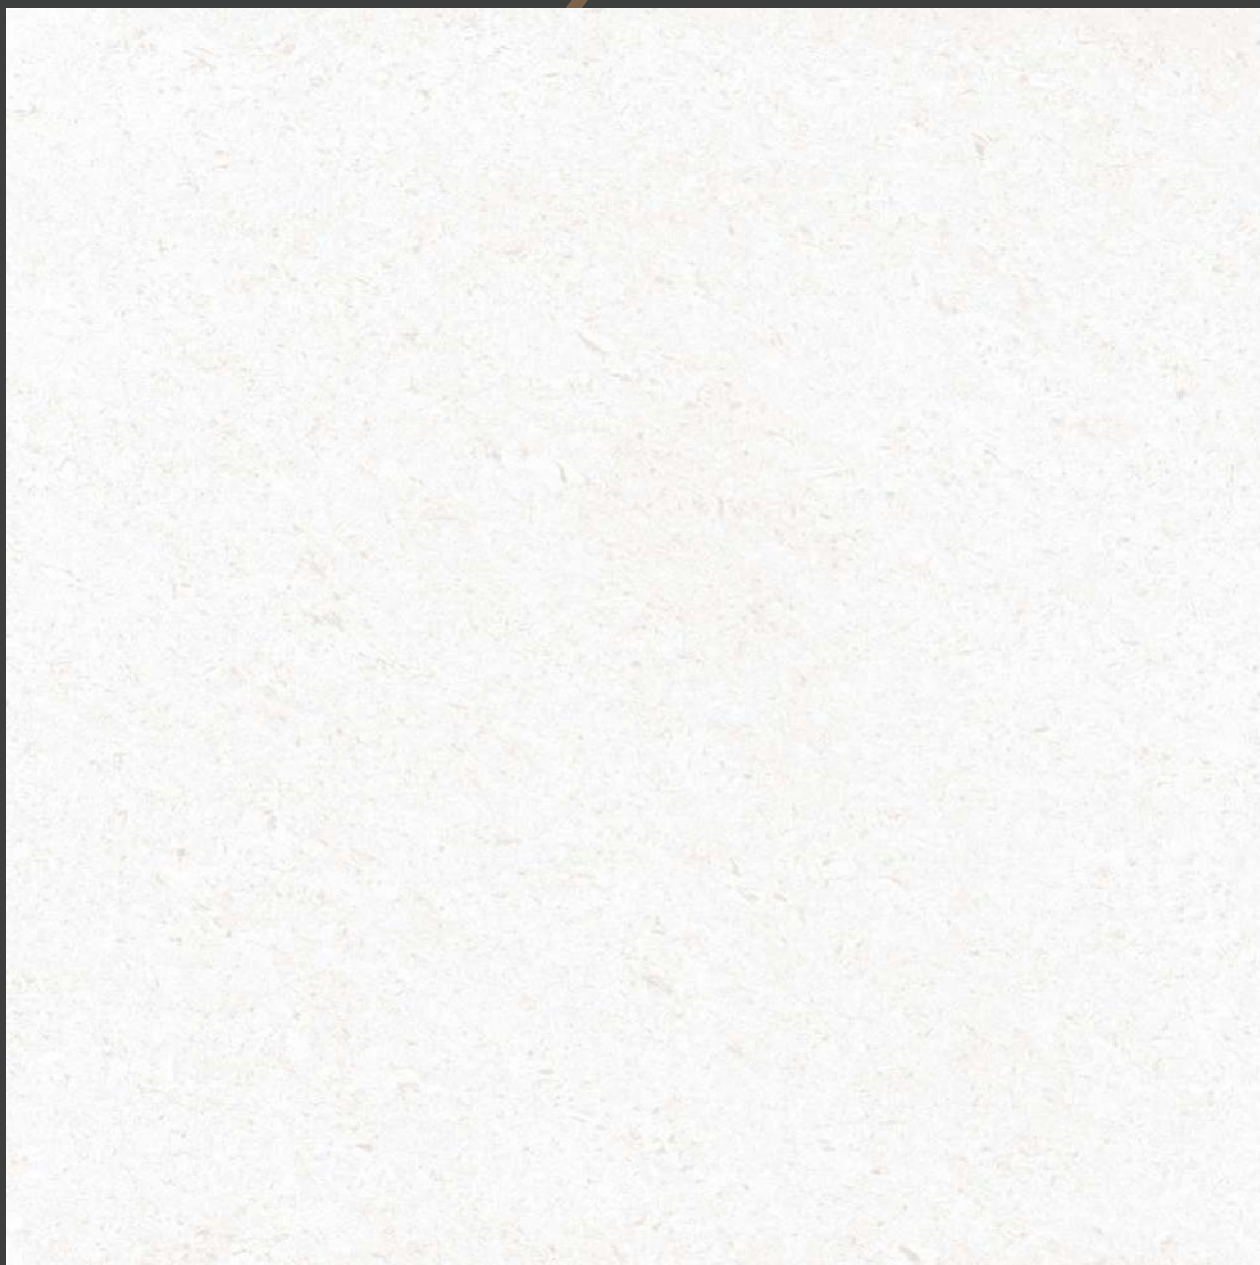


ORELIA
GROUP

Magic
Series

MAGIC FOSSIL

600 x 600 mm

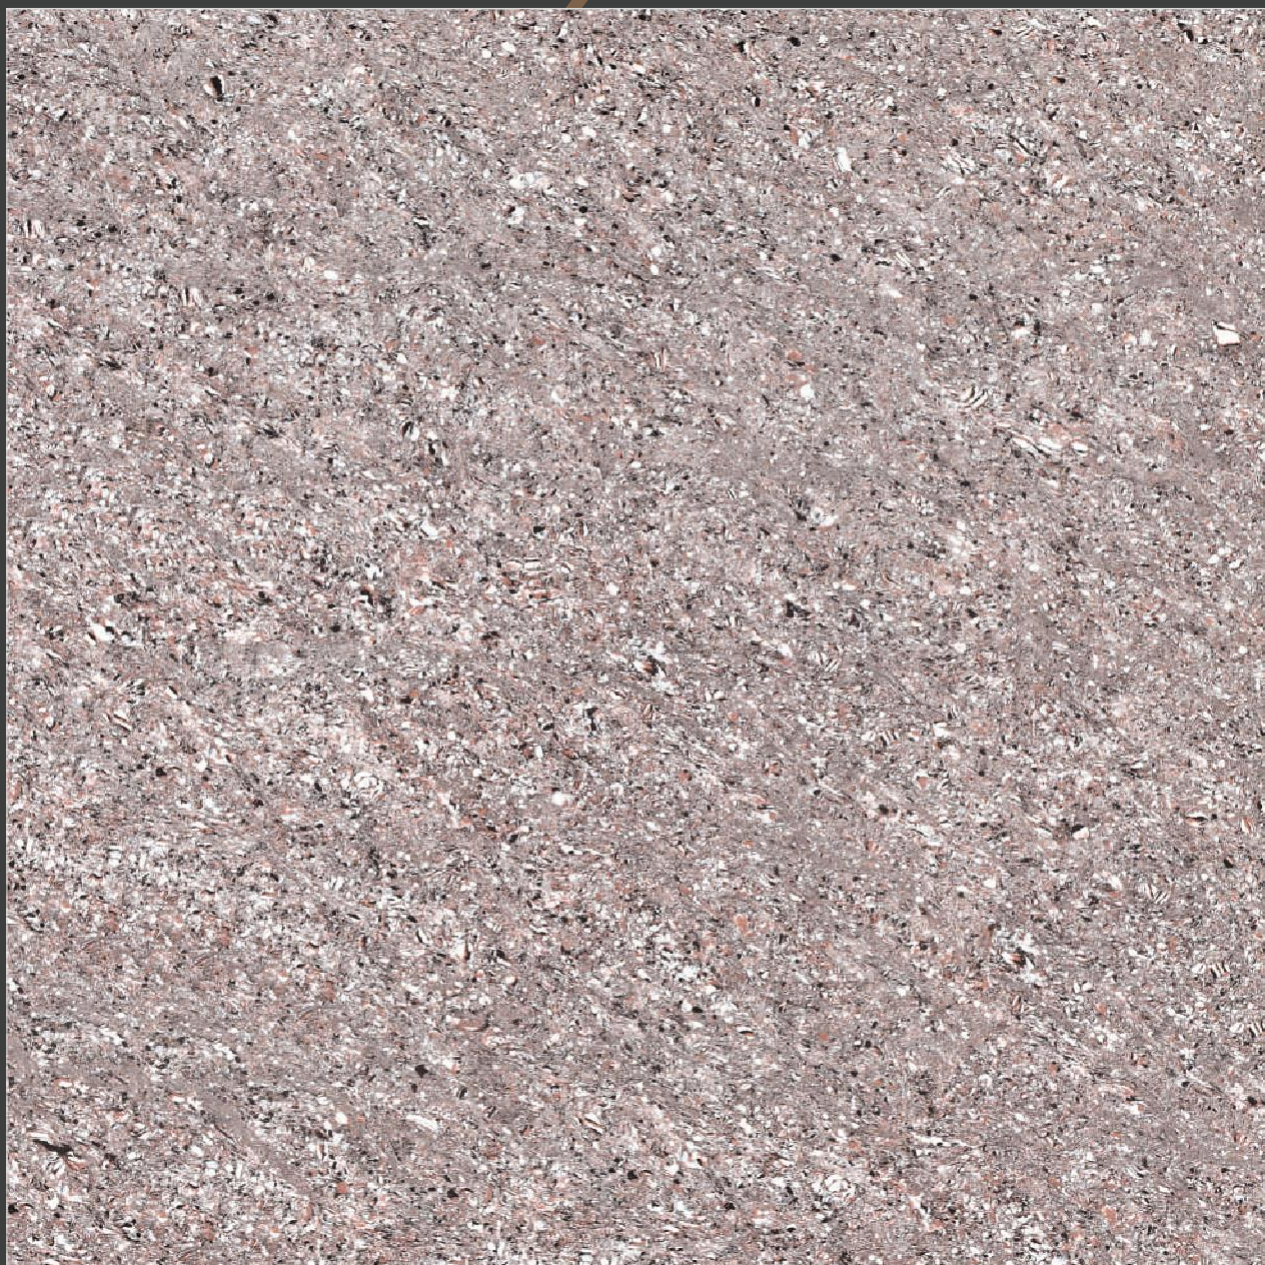

ORELIA
GROUP

Magic
Series



MAGIC FOSSIL

600 x 600 mm

ORELIA
GROUP

Magic
Series

MAGIC PEACH

600 x 600 mm



ORELIA
GROUP

Magic
Series

MAGIC STONE

600 x 600 mm




ORELIA
GROUP

Magic
Series

MAGIC GRAPHITE

600 x 600 mm

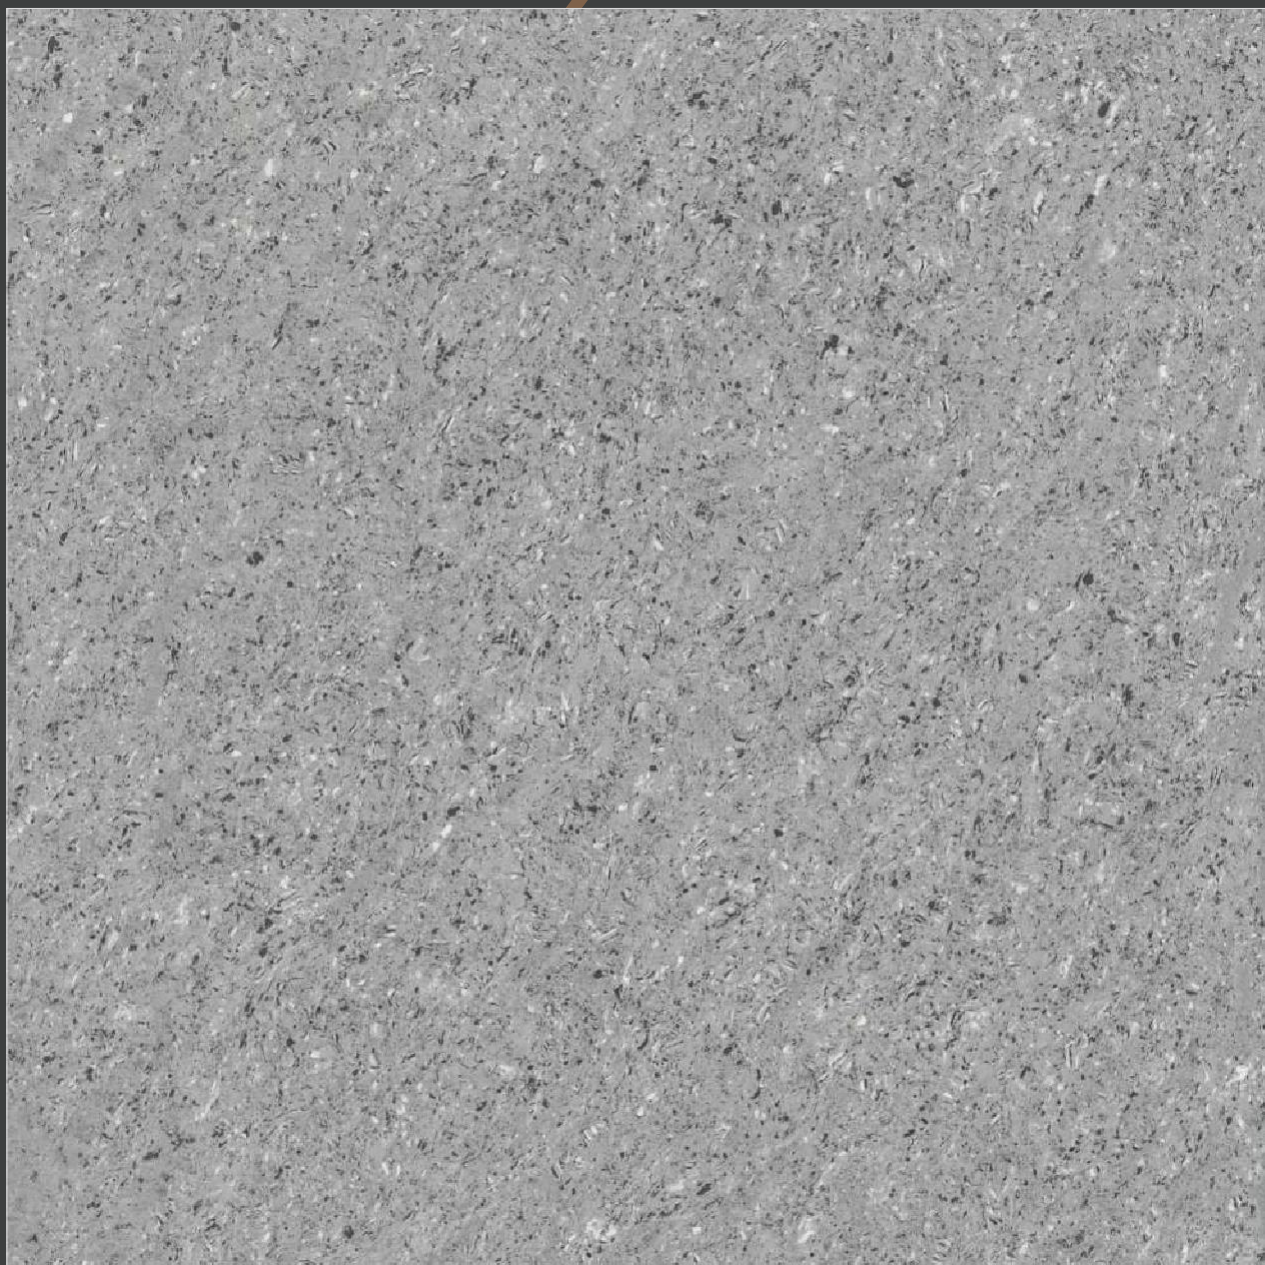

ORELIA
GROUP

Magic
Series

MAGIC ROSE

600 x 600 mm



ORELIA
GROUP

Magic
Series

MAGIC SANDY

600 x 600 mm



ORELIA
GROUP

Magic
Series

MAGIC ASH

600 x 600 mm



ORELIA
GROUP

Magic
Series

MAGIC VIOLET

600 x 600 mm



ORELIA
GROUP

Magic
Series

MAGIC CADBURY

600 x 600 mm



ORELIA
GROUP

Magic
Series

MAGIC GOLD

600 x 600 mm



ORELIA
GROUP

Magic
Series

MAGIC CREMA WHITE

600 x 600 mm




ORELIA
GROUP

Magic
Series

MAGIC PINK

600 x 600 mm

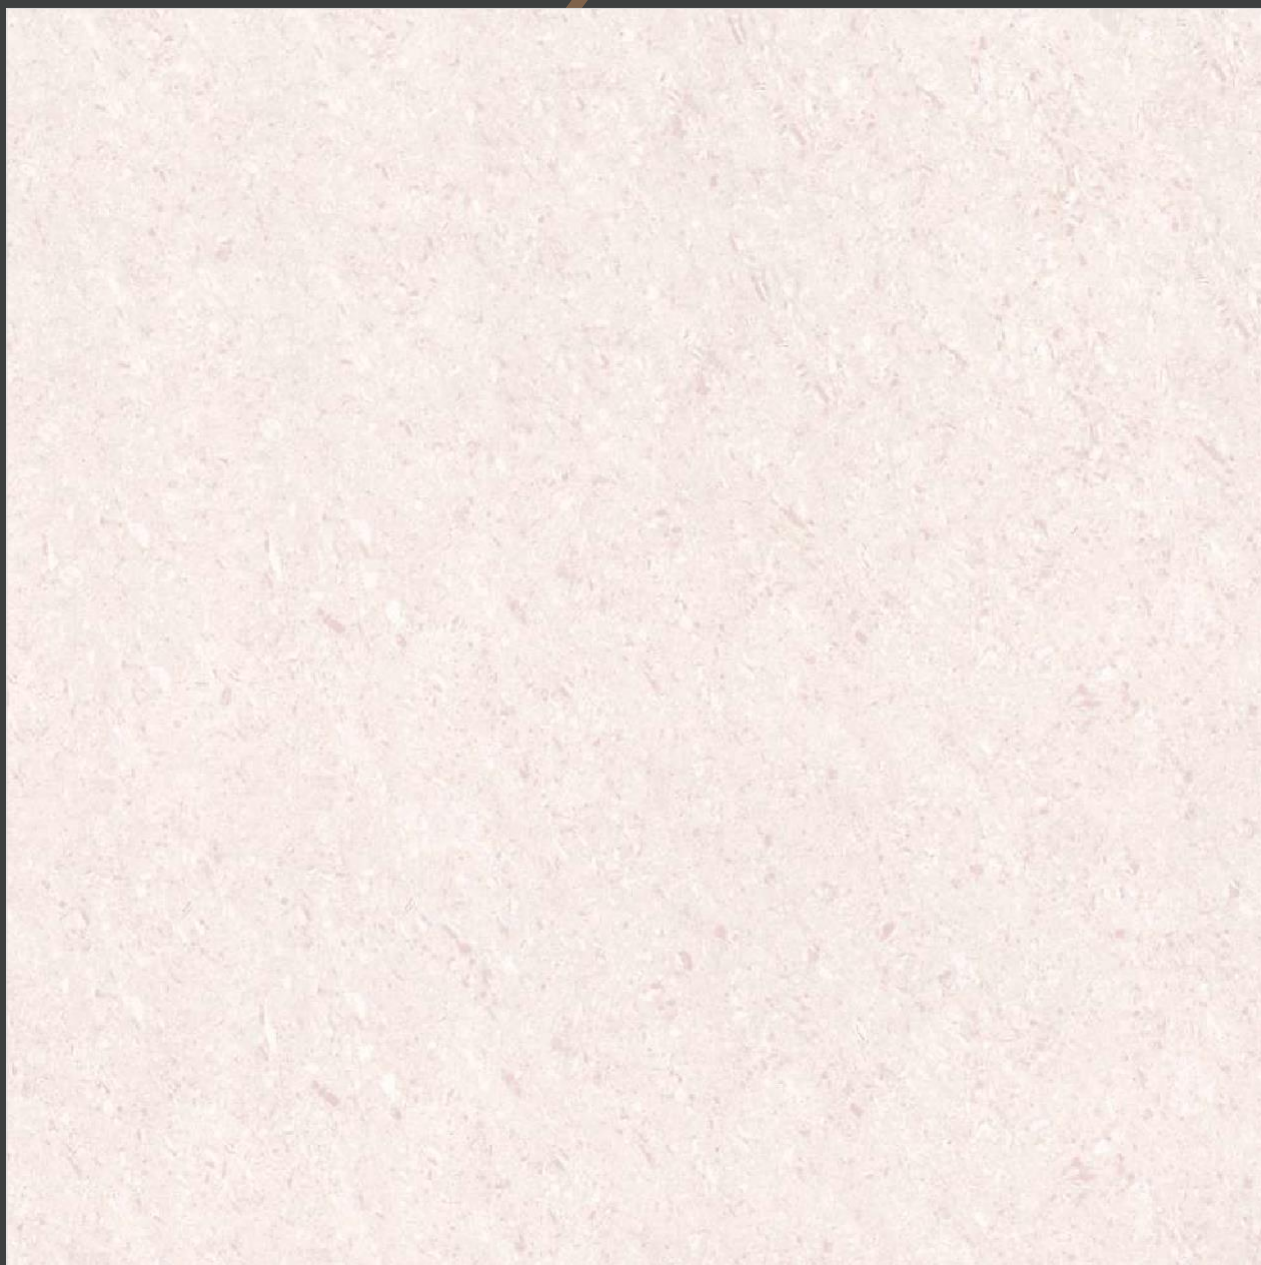

ORELIA
GROUP

Magic
Series

MAGIC PISTA

600 x 600 mm




ORELIA
GROUP

Magic
Series

MAGIC BEIGE

600 x 600 mm

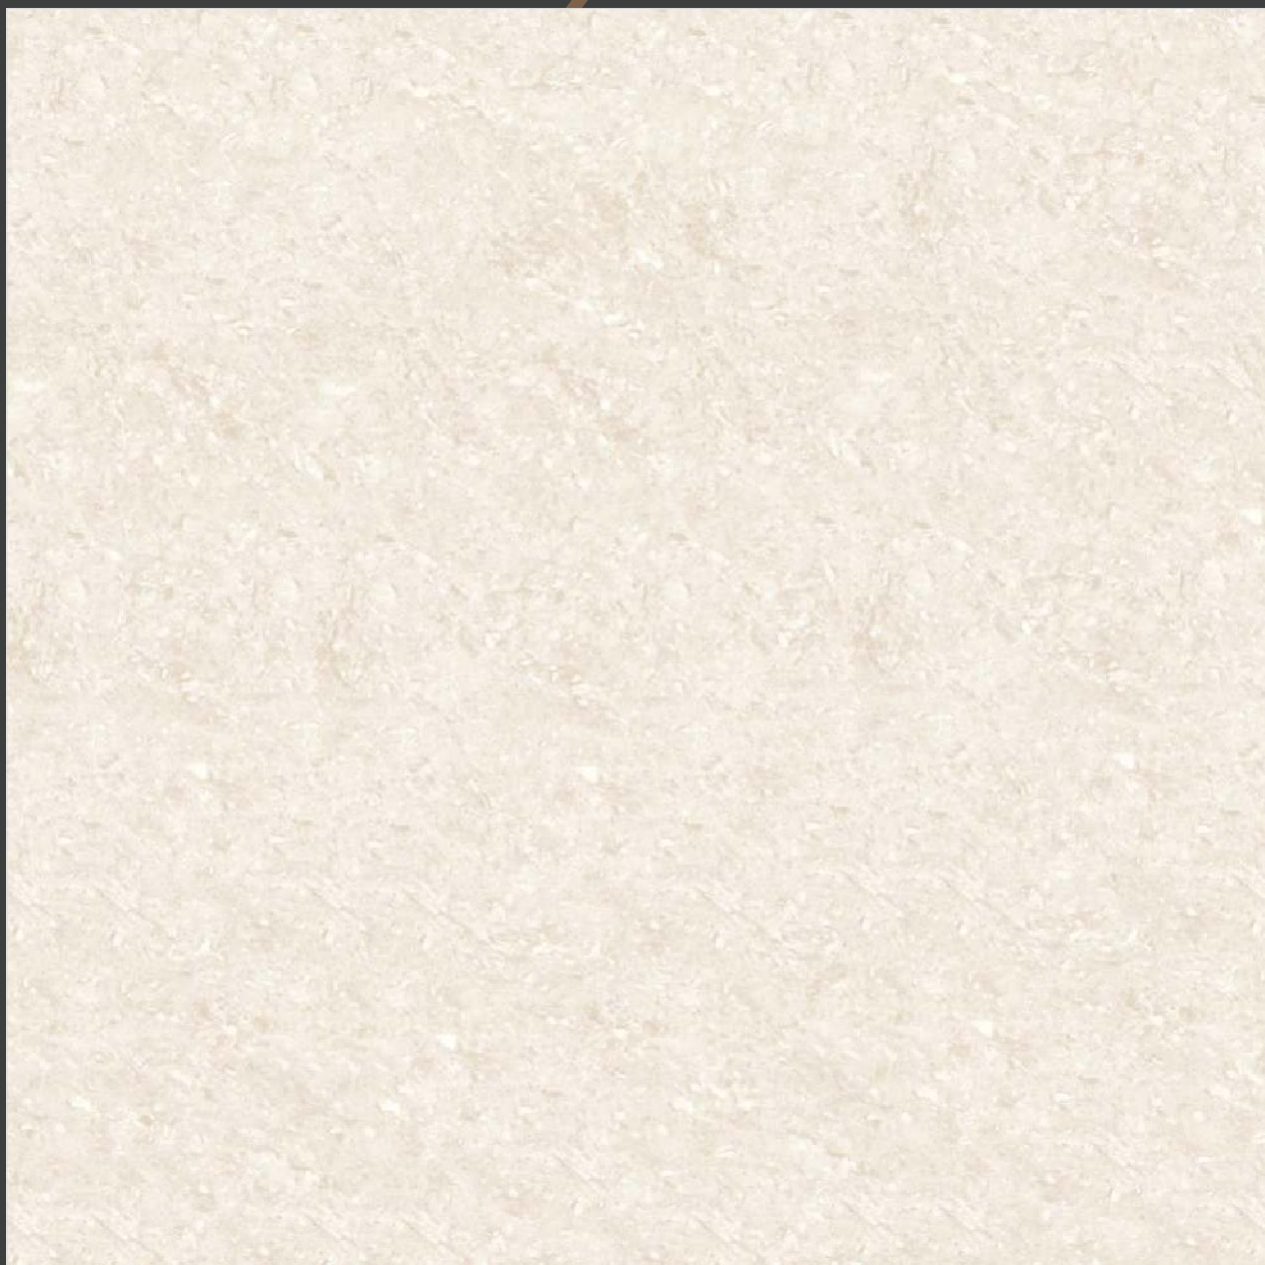

ORELIA
GROUP

TILES



Pearl
White

600 x 600 mm

PEARL WHITE

600 x 600 mm





Fusion Series


600 x 600 mm

ORELIA
GROUP

Fusion
Series

FUSION BLACK

600 x 600 mm

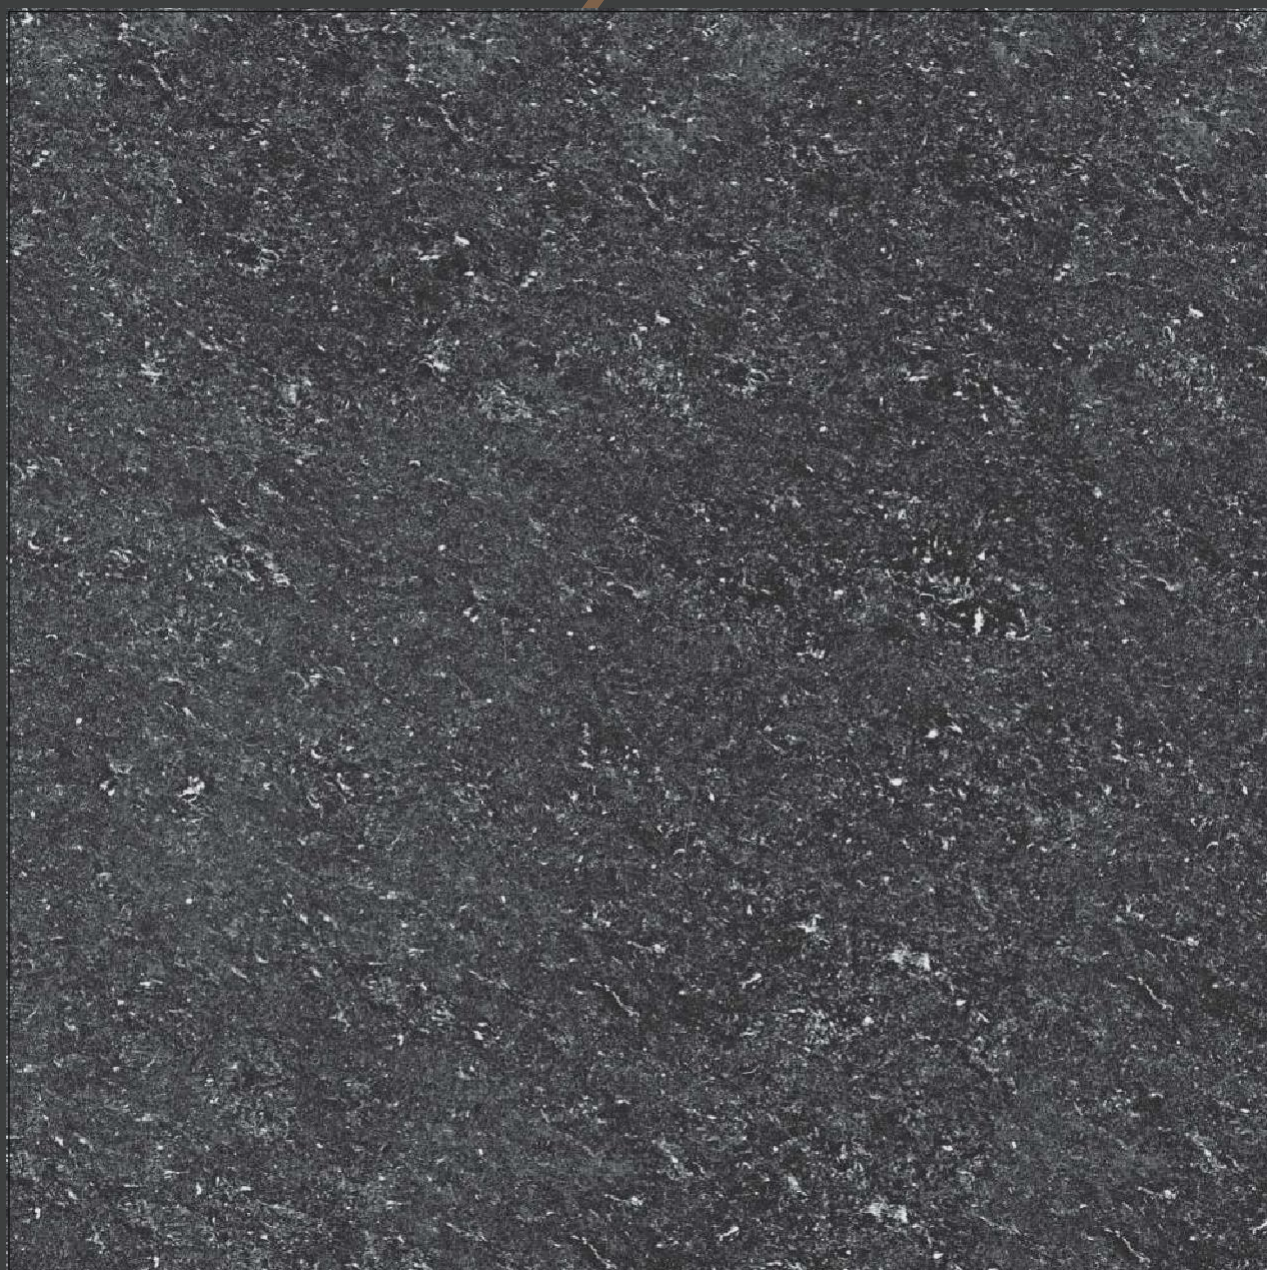

ORELIA
GROUP

Fusion
Series

FUSION ALMOND

600 x 600 mm




ORELIA
GROUP

Fusion
Series

FUSION MAJESTIC

600 x 600 mm

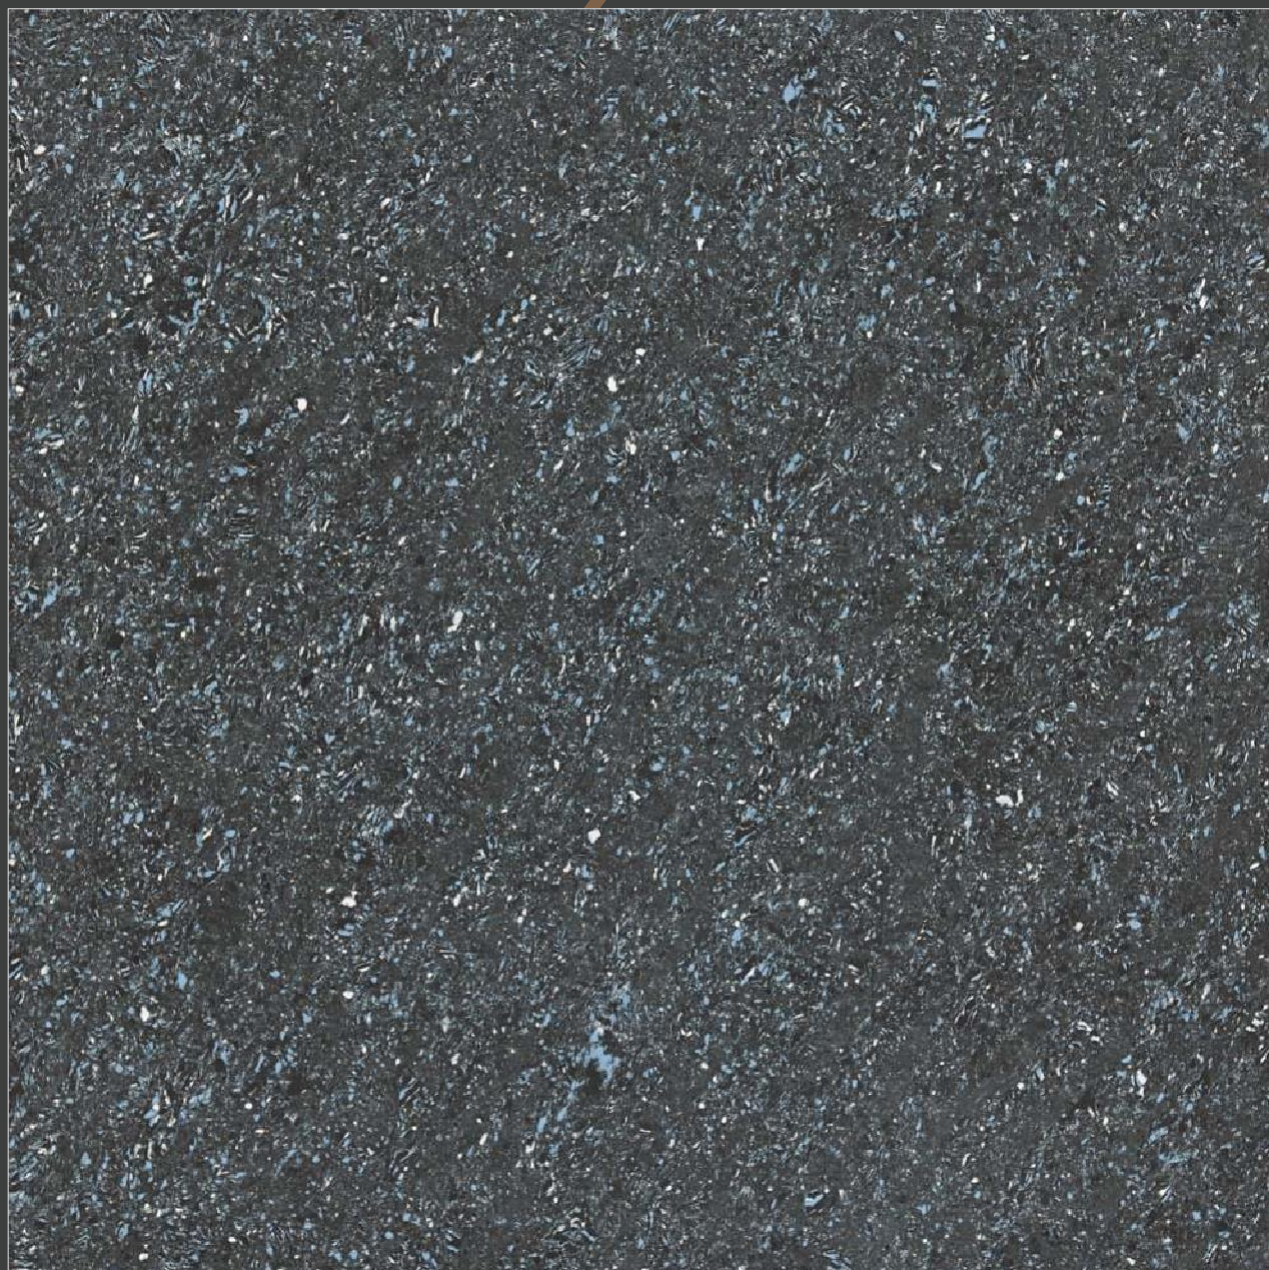

ORELIA
GROUP

Fusion
Series

FUSION GREY

600 x 600 mm



ORELIA
GROUP

Fusion
Series

FUSION BRONZE

600 x 600 mm



ORELIA
GROUP

Fusion
Series

FUSION MARBLE

600 x 600 mm





Jupitar

Series

600 x 600 mm

ORELIA
GROUP

TILES

ORELIA
GROUP

Jupiter
Series

JUPITER AMBER

600 x 600 mm



ORELIA
GROUP

Jupiter
Series



JUPITER AMBER

600 x 600 mm

ORELIA
GROUP

Jupiter
Series

JUPITER THUNDER

600 x 600 mm



ORELIA
GROUP
TILES



Onyx
Series


600 x 600 mm

ORELIA
GROUP

Onyx
Series

ONYX WHITE

600 x 600 mm

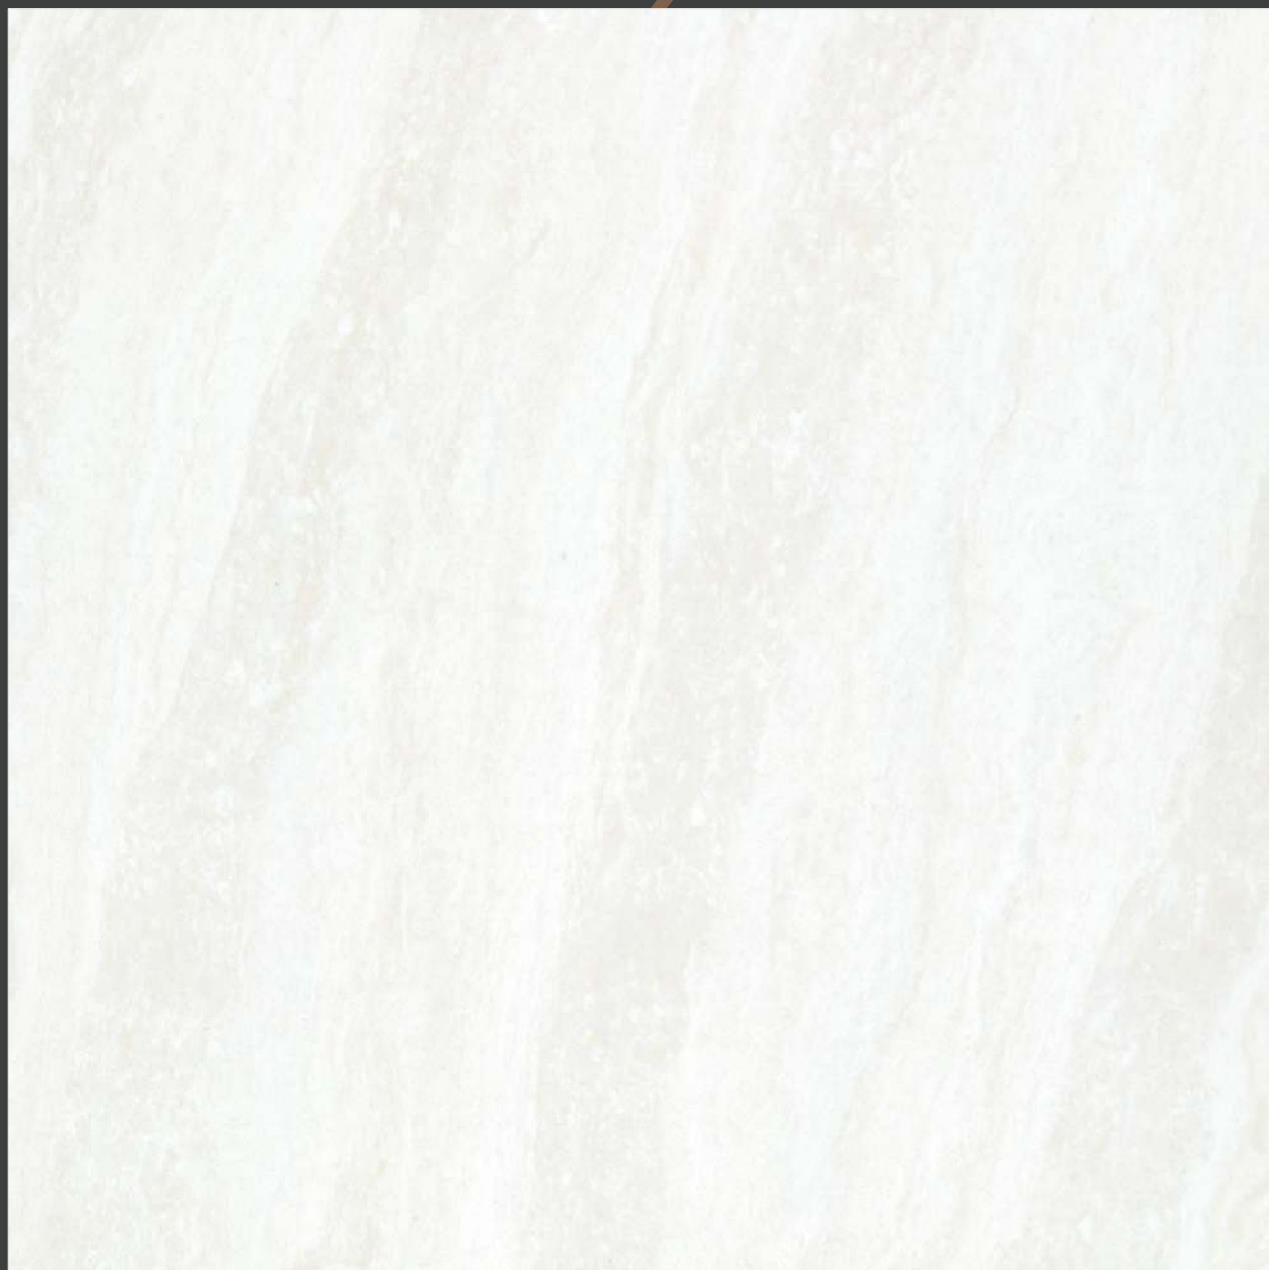

ORELIA
GROUP

Onyx
Series

ONYX GOLD

600 x 600 mm




ORELIA
GROUP

Onyx
Series

ONYX ROMANO

600 x 600 mm

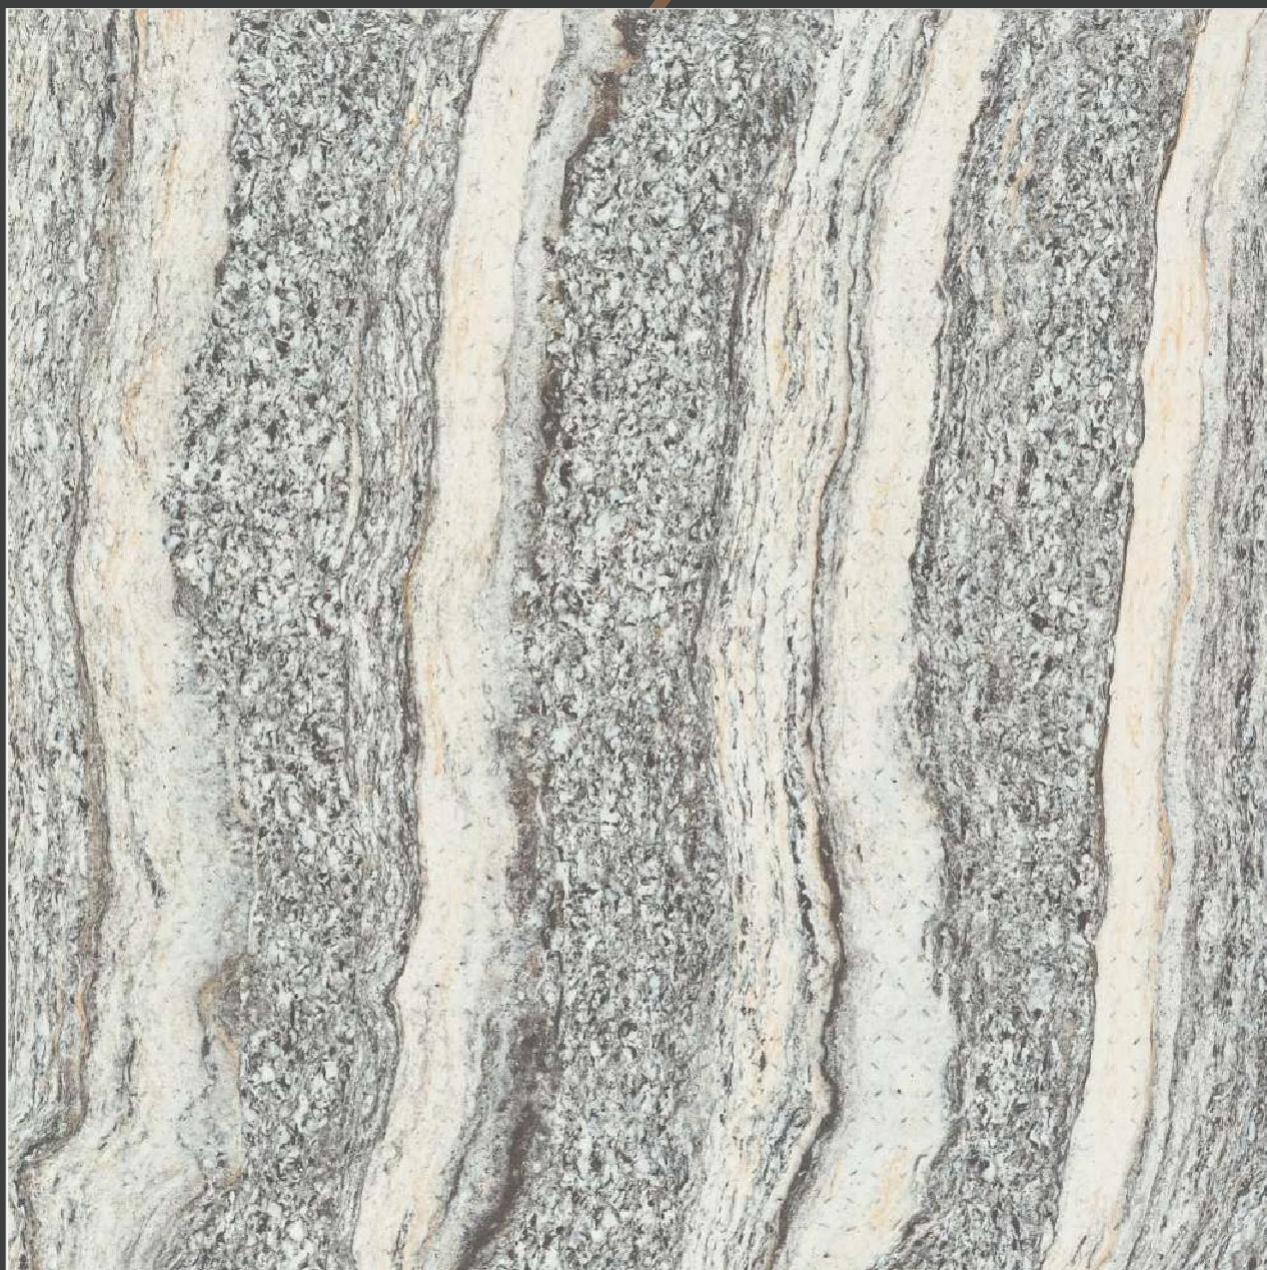

ORELIA
GROUP

Onyx
Series



ONYX ROMANO


600 x 600 mm

ORELIA
GROUP

Onyx
Series

ONYX CHERY

600 x 600 mm

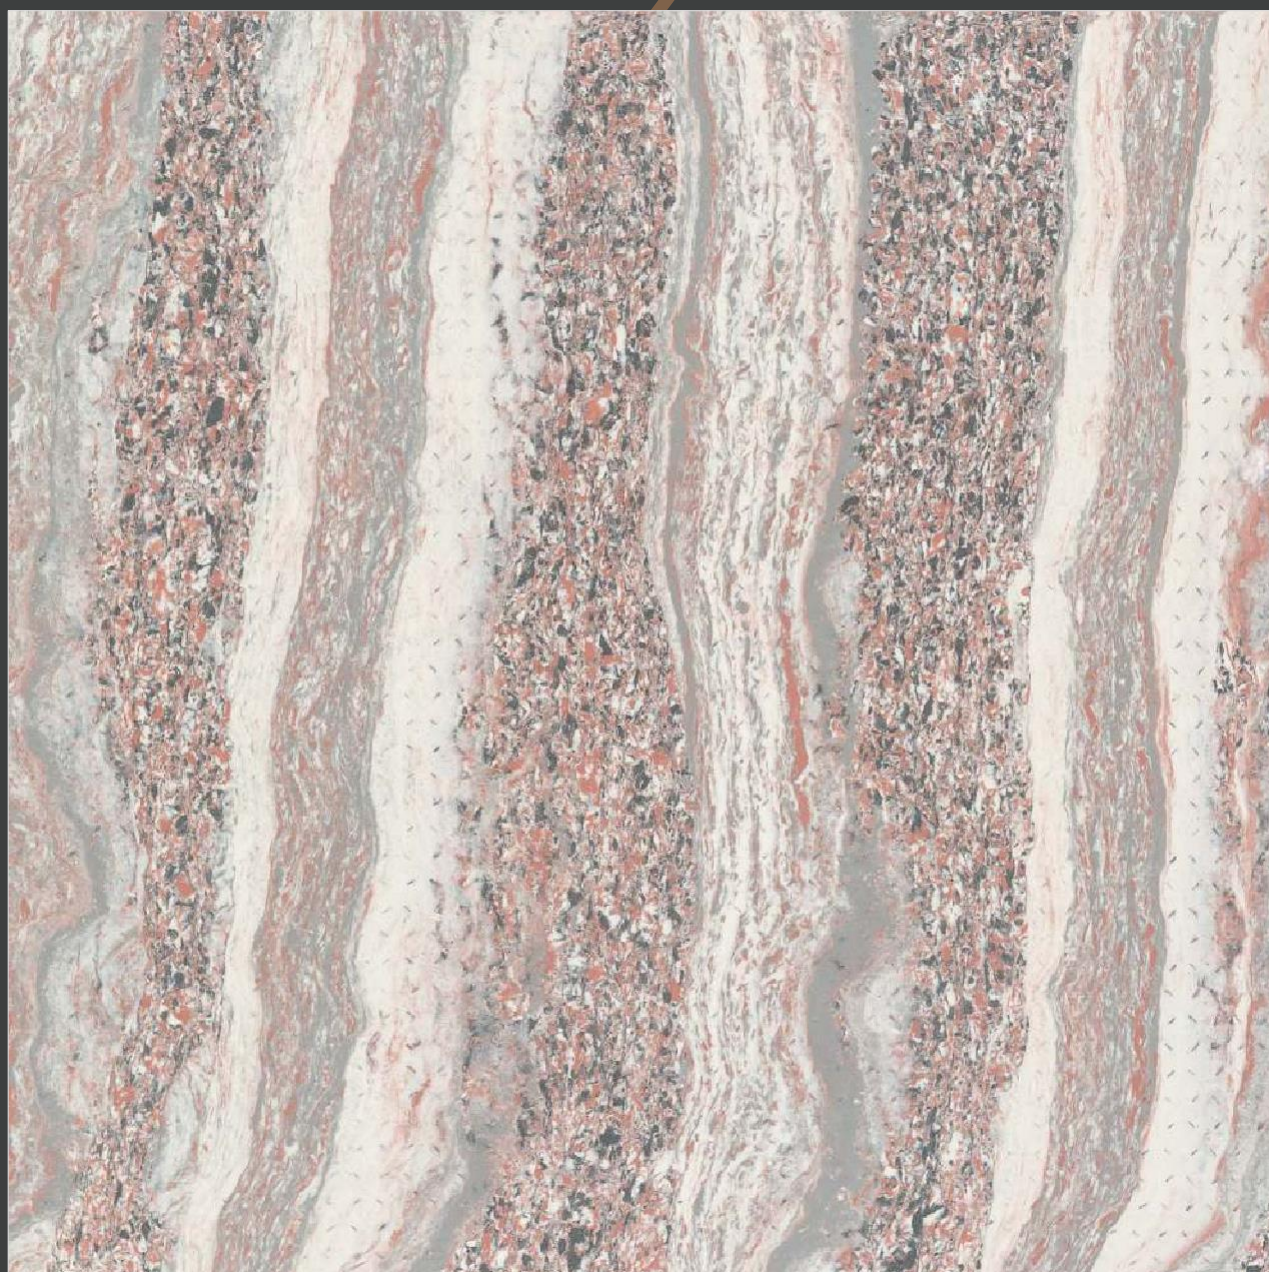


ORELIA
GROUP

Onyx
Series

ONYX ICE

600 x 600 mm

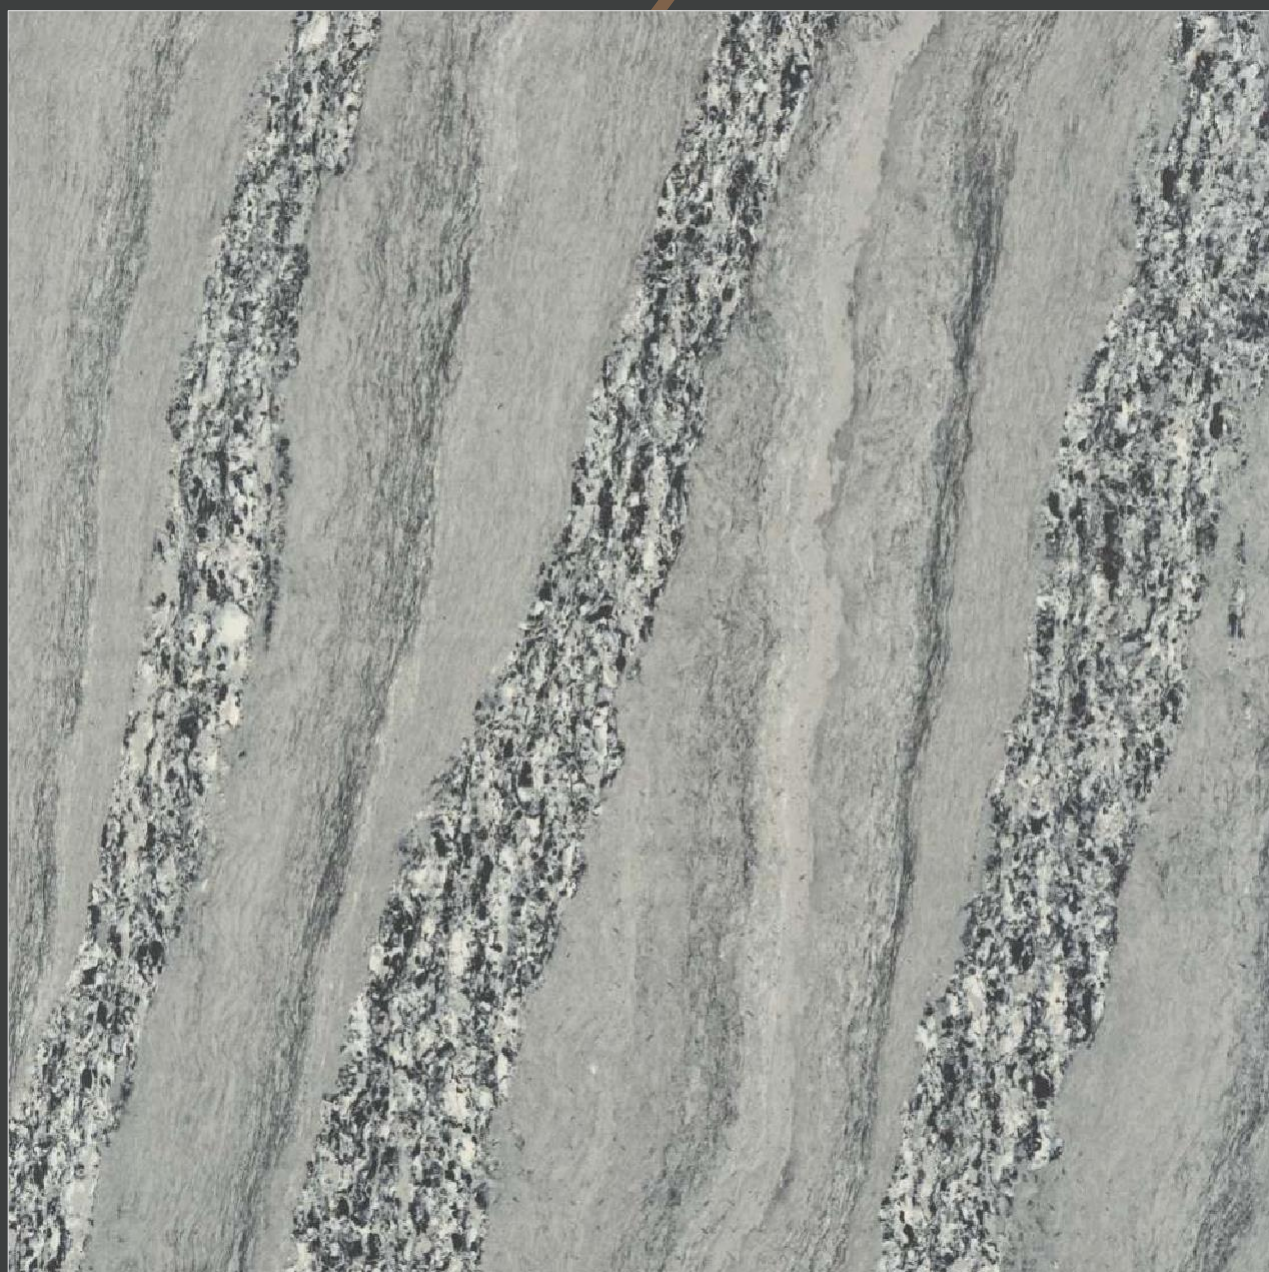



Aster

Series

600 x 600 mm

ORELIA
GROUP


TILES

ORELIA
GROUP

Aster
Series

ASTER BLACK

600 x 600 mm

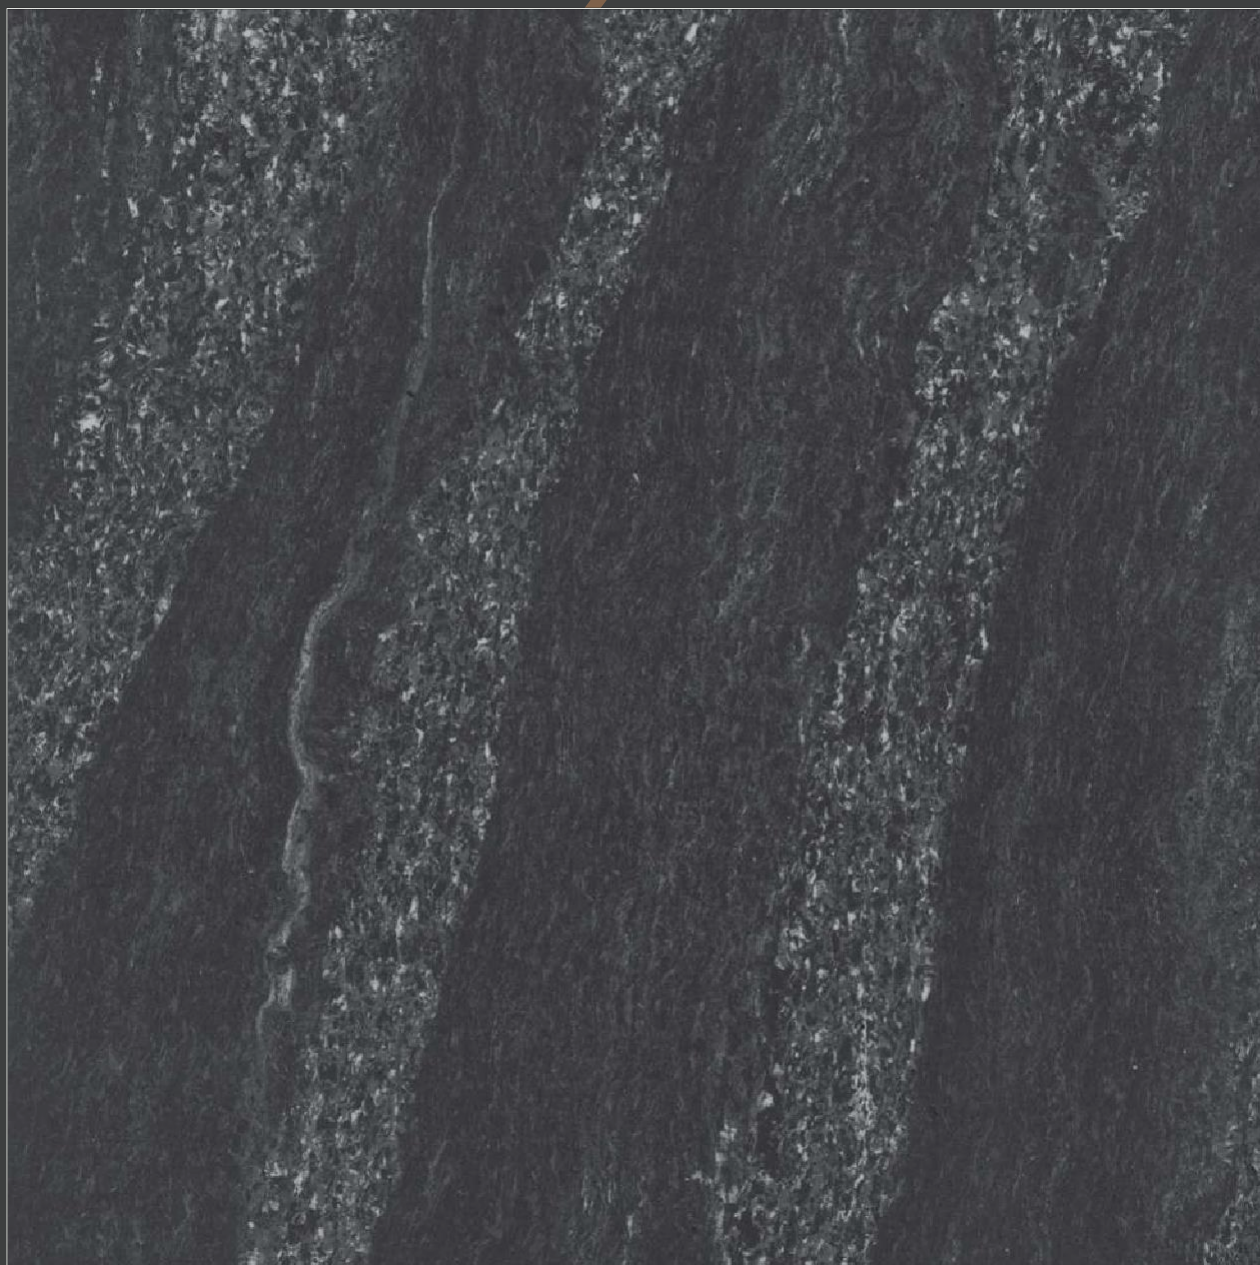

TECHNICAL SPECIFICATION

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP Bla	MEAN VALUE OF ORELIA GROUP TILES	METHOD OF TEST
Deviation In Length & Width	±0.50%	±0.20%	ISO-10545-2
Deviation In Thickness	±5.00%	±5.00%	ISO-10545-2
Straightness Of Sides	±0.50%	±0.50%	ISO-10545-2
Rectangularity	±0.50%	±0.50%	ISO-10545-2
Surface Flatness	±0.50%	±0.10%	ISO-10545-2
Glossiness	As Per Manufacturer	Min. 88%	Glossmeter
Water Absorption	≤0.50%	≤0.50%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Deep Abrasion Resistance	Max. 175mm ³	Max. 140mm ³	ISO-10545-6
Moh's Hardness	Min. 6	6*	EN 101
Frost Resistance	No Damage	Frost Proof	ISO-10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	Max 9.0 x 10.6	Max 6.5 x 10 ⁻⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14
Slip Resistance (friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17
Color Differences	Unaltered	No Change	ISO-10545-16
Flexural Modulus Of Repture	Min 35N/mm ²	Min 40N/mm ²	ISO-10545-4
Flexural Breaking Strength	Min 1300 N	Min 1700 N	ISO-10545-4
Apparent Density	> 2.00 gm/cc	>2.28 gm/cc	DIN 51082
Impact Resistance	As per Manufacturer	Min 0.55	ISO-10545-5

PACKING DETAILS

Size	Normal Thickness	No. of Tiles/Box	Coverage Area	Wt. of Box
600x600mm	8 mm	4 pcs.	15.50 sq. ft./1.44 sq. mt.	24.50 Kgs. (approx)

DISCLAIMER :

Icon reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colors of tiles shown in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors and references should be verified for typographical errors.



Head Office: 86/2, Lower Ground
Floor, Government College Rd, Civil
Lines, Ludhiana, Punjab 141001,
India

-

Mr. Vishal Sharma
(International Export Manager)
M: +91 9915406626
Email : ib@orelia.co.in